

# Seismic testing of a model structure with semi-active resetable devices

R. Franco-Anaya, A.J. Carr & J.B. Mander

*Department of Civil Engineering, University of Canterbury, Christchurch.*

J.G. Chase, K.J. Mulligan & G.W. Rodgers

*Department of Mechanical Eng., University of Canterbury, Christchurch.*



2007 NZSEE  
Conference

**ABSTRACT:** Semi-active resetable devices have recently been considered to reduce the seismic response of civil engineering structures. Resetable energy dissipation devices are fundamentally hydraulic or pneumatic spring elements that possess the ability to release the stored spring energy at any time. Instead of altering the damping directly, resetable devices nonlinearly alter the stiffness of the structure. This paper describes a series of shaking table tests of a four-storey model structure subjected to seismic excitation. The model structure is a one-fifth scale steel moment-resisting frame and aims to model a typical reinforced concrete frame building. Two semi-active resetable devices were installed in the lateral bracing of the model structure to reduce the seismic response. The devices modified the stiffness of the model structure by following a control algorithm that utilised the measured dynamic response of the structure. The results of the shaking table tests are presented and interpreted.

## 1 INTRODUCTION

Different semi-active control systems have been proposed to reduce the seismic response of civil engineering structures (Symans & Constantinou 1999). In particular, semi-active resetable devices are quite promising for earthquake engineering applications (Jabbari & Bobrow 2002, Hunt 2002, Mulligan et al. 2005, Chase et al. 2006). Semi-active resetable devices are fundamentally hydraulic or pneumatic spring elements. They possess the ability to release the stored spring energy at any time. Instead of altering the damping directly, resetable devices nonlinearly alter the structural stiffness. Resetable devices also offer the opportunity to sculpt or re-shape hysteretic behaviour because of the possibility to control the device valve and reset times actively (Chase et al. 2006, Rodgers et al. 2007).

Semi-active control systems have only recently been considered for applications to large civil structures. Therefore, most of the research in this area has been devoted to analytical and numerical studies in which a number of idealized assumptions are made. The validity of such assumptions must be evaluated through experimental research (Symans & Constantinou 1995). Experimental testing of semi-active control systems can be helpful to identify important aspects of eventual full-scale implementations, including non-linear structural effects, control-structure interaction, actuator and sensor dynamics, actuator saturation effects, system integration, etc. In addition, experimental testing can be important to detect potential obstacles and limitations for the implementation of semi-active control systems in actual structures.


This paper describes an experimental investigation of a four-storey model structure subjected to seismic excitation and controlled by two semi-active resetable devices. Shaking table tests were performed on the model structure both with and without the semi-active resetable devices. The devices were installed in the lateral bracing of the model structure. The mechanical properties of the devices were modified according to a control algorithm that took into account the measured response of the model structure. The model structure was subjected to four different simulated earthquake ground motions at various peak ground accelerations. Reductions in relative floor displacements, absolute floor accelerations, inter-storey drift ratios and total base shear are used to evaluate the seismic performance of the model structure.

## 2 DESCRIPTION OF THE MODEL STRUCTURE

To assess the effectiveness of semi-active resetable devices in reducing the seismic response of structures, a series of shaking table tests were performed on the four-storey model structure shown in Figure 1a. The model structure was designed and tested by Kao (1998). A main feature of this steel moment-resisting frame structure is the incorporation of replaceable fuses located in critical regions of the structure to show the effects of inelastic structural performance under seismic loading.



(a) Model structure

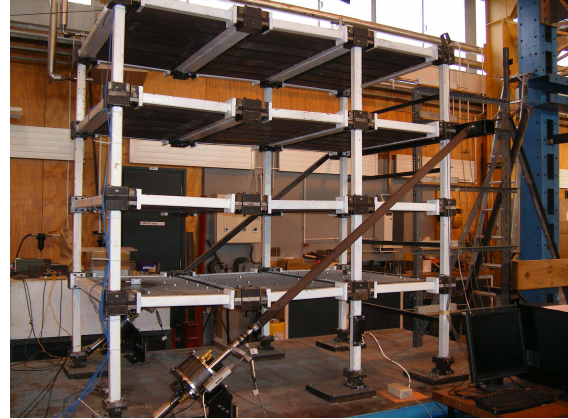

(b) System implementation

Figure 1. Four-storey model structure and system implementation.

The model building is a 2.1 m high three-dimensional four-storey frame structure. The frames are built using square hollow steel sections for beam and column members. The fuses, beam-column joints and other connecting components are made of steel flat bars. Two frames in the longitudinal direction provide the lateral load resistance. Each frame has two bays with 0.7 m and 1.4 m long spans. The short bay is to show earthquake dominated response, while the long bay is to show gravity dominated response by having an extra point load induced by a transverse beam at the mid-span at each level. In the transverse direction, three one-bay frames with 1.2 m long span provide lateral stability and carry most of the gravity load. A one-way floor slab provides a significant proportion of the model mass. The slab is made of steel planks and is connected to a rigid steel plate that acts as a diaphragm. The planks are simply supported on the beams of the transverse frames and on the intermediate beam supported by the long span beams of the longitudinal frames (Fig. 1).

The four-storey model building was designed as a one-fifth scale structure. It was intended to model the structure as a typical four-storey reinforced concrete frame building, therefore, the natural period of the model was required to be within 0.4 s to 0.6 s to obtain similar response under earthquake excitation (Kao 1998). The equivalent static method, outlined in the New Zealand Loadings Standard NZS 4203: 1993, was employed to calculate the earthquake forces. The seismic weight of the one-fifth scale structure is 35.3 kN. A structural ductility factor of 6 was adopted for the structural design. Thus, the model structure was designed for a base shear force of 8.7% of its seismic weight.

## 3 DESCRIPTION OF THE RESETABLE DEVICE

The resetable device used in this research dissipates energy by using a two-chambered design that utilises each piston side independently (Mulligan et al. 2005, Chase et al. 2006, Rodgers et al. 2007). This approach treats each side of the piston as an independent chamber with its own valve and control. The two-chambered design allows a wider variety of control laws to be imposed, as each valve can be operated independently, allowing independent control of the pressure on each side of the piston. Figure 2a shows a schematic of the two-chambered design of the device.

During a seismic event, energy is stored in the device by compressing air as the piston is displaced from its centre position. When the piston reaches its maximum displaced position, the stored energy is also at a maximum. At this point the stored energy is released by discharging the air through the device valve. As the piston begins moving in the other direction, the device resists that motion until the next change of direction. Air is used as the working fluid because of its simplicity and the possibility to use the surrounding atmosphere as the fluid reservoir. In combination with independent valves, it allows more time for the device pressures to equalise. Therefore, while the opposing chamber is under compression, the previously reset chamber can release pressure over a longer period of time by having its valve open. This allows significant amounts of energy to be stored and dissipated (Mulligan et al. 2005, Chase et al. 2006, Rodgers et al. 2007).


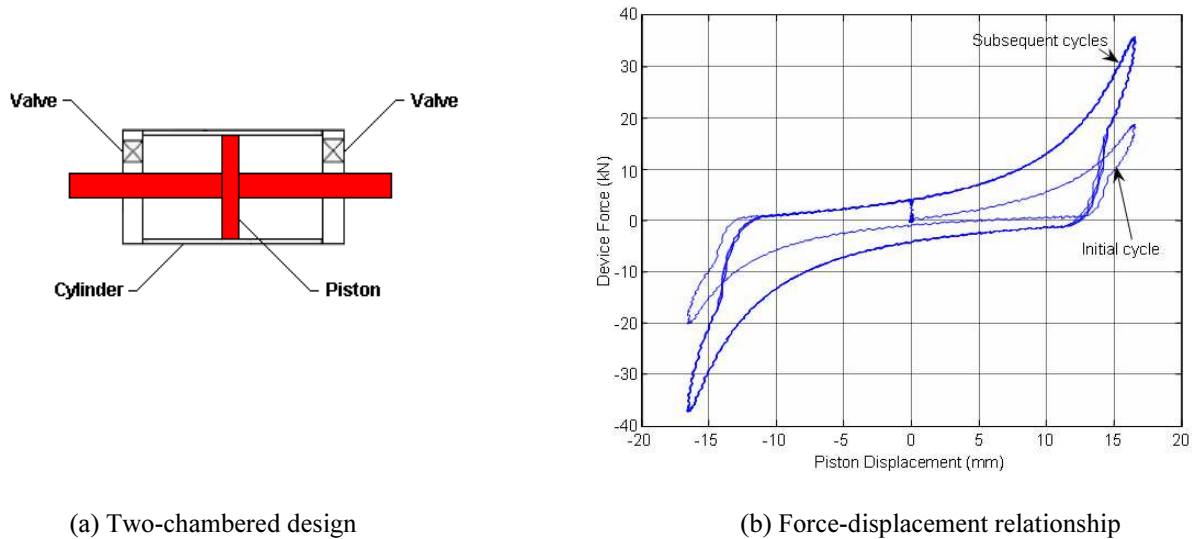



Figure 2. Schematic of the two-chambered design and force-displacement curve of the device.

The dynamic characteristics of the device were established by experimental tests exploring the response to various input signals. Additionally, the impact and efficacy of different device control laws in adding supplemental damping was investigated. Particular focus was given to the amount of time required to dissipate large amounts of stored energy and its impact on performance, as well as the impact of different control laws on the resulting hysteresis loop. Once the device was characterised, a detailed model was created and validated experimentally (Mulligan et al. 2005, Chase et al. 2006). Figure 2b shows experimental results for the device when subjected to a sine wave input at a frequency of 1 Hz and amplitude of 16.5 mm. It can be seen that the peak force developed at 16.5 mm displacement is about 35 kN. The frequency of experimental testing is an important factor for practical implementation of resettable devices and should be done at frequencies similar to those expected for earthquake induced vibrations in structures (Rodgers et al. 2007).

A photograph of the resettable device is shown in Figure 3a. The piston located inside the cylinder has four seals to ensure minimal air movement between the two chambers, each of the seals is located in a groove. It is important to notice that such air movement would reduce the effective stiffness and energy dissipated by the device. The end caps are press fitted into the cylinder and held in place by eight clamping rods. An O-ring located between the end caps and the cylinder further ensures no leakage of air. Where the piston shaft passes through the end caps, air is prevented from escaping by two seals located in the end caps (Fig. 3b). The fundamental design parameters of the device are the diameter, individual chamber length and maximum piston displacement. These parameters can be used to control the stiffness of the device (Mulligan et al. 2005, Chase et al. 2006).

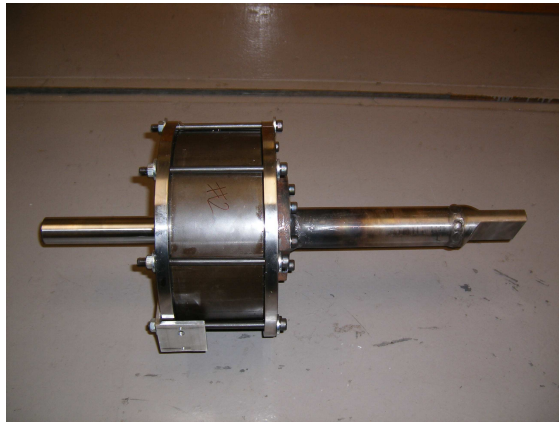

(a) Resetable device

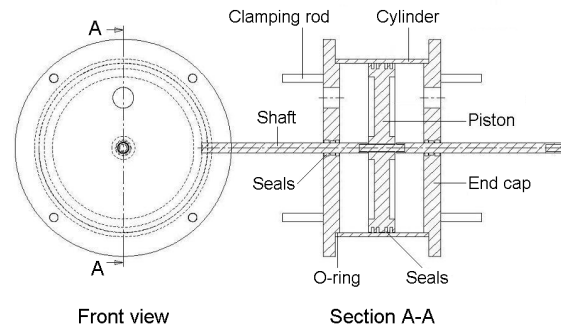

(b) Schematic of the device

Figure 3. Semi-active resetable device.

#### 4 IMPLEMENTATION OF THE CONTROL SYSTEM

Irrespective of the type of device used, adding supplemental devices to a frame structure involves increasing the lateral stiffness of the structure. However, a reduction in the lateral stiffness may also be observed when a braced-frame structure is replaced by a damper-braced-frame structure (Pekcan 1998). An increase in stiffness leads to an increase in the seismic energy input which in turn must be dissipated by the damping devices and/or inelastic action of the structural members. Lateral forces as well as deformations may increase or decrease in the structure, depending on the effect of devices and connections on the dynamic characteristics of the structure, and on the characteristics of the ground motion. Moreover, the magnitude of the increased lateral stiffness in a structure varies depending on the type of device used (Pekcan 2000, Bishay-Girges 2004).

The four-storey model structure was tested on a unidirectional shake table. The model structure was bolted to the shake table in such a way that the longitudinal frames of the model were parallel to the motion of the table. The model structure was tested without resetable devices (uncontrolled case) and with two resetable devices (controlled case). Each device was placed at the lower end of a steel tendon element (Fig. 1b). The steel tendon element was installed along the two bays and was connected to the model structure at the third floor to transfer the control forces (Franco-Anaya et al. 2006).

The dynamic properties of the model structure with and without resetable devices were identified by using free vibration tests. The free vibration tests were carried out by pulling the model structure to one side using a steel wire. After achieving a target floor displacement, the steel wire was cut to allow the structure to vibrate freely. Before attaching the resetable devices to the model structure, free vibration testing was carried out with a maximum 2.5 mm displacement at the top floor to ensure that the test structure remained elastic. The natural period of the structure was found to be 0.44 s with the corresponding equivalent viscous damping ratio of 1.21%.

Four different earthquake ground motions were used as input to the shaking table, namely El Centro 1940 NS, Taft 1952 S21W, Sylmar County 1994 and Kobe 1995 N000E. The amplitude of the earthquake records was scaled in order to excite the model structure with earthquake ground motions of different intensity. Various linear potentiometers and accelerometers were used to measure the response of the model structure and the motion of the shaking table. A linear potentiometer located along the axis of each resetable device was used to measure the displacement of the piston shaft with respect to the device housing. The force in each device was measured by a load cell placed between the device and the steel tendon element. During the shake table tests, responses and loads of the model structure were measured and sent to a control computer. The control computer processed the responses according to a predetermined control algorithm and sent an appropriate command signal to the device valves. Figure 1b shows a photograph of the system implementation on the model structure.

## 5 EXPERIMENTAL RESULTS OF SHAKING TABLE TESTS

An assessment of the effectiveness of the semi-active resetable devices in reducing the seismic response is made by comparing the response of the model structure with and without devices for the same earthquake ground motion. In presenting the shaking table tests results major emphasis is given to the overall response of the model structure. Effects of adding the resetable devices to the structure are identified from the shaking table tests in terms of relative displacements, absolute accelerations, inter-storey drift ratios and total base shear (i.e. including the contribution of the tendon element).

The four-storey model structure was first tested with resetable devices (controlled case) and then without resetable devices (uncontrolled case). Different device control laws were used for the controlled case. The device control law presented in this paper corresponds to the 1-4 device control in which the stored spring energy is released at the peak of each cycle while all other motion is resisted by the device (Mulligan et al. 2005, Chase et al. 2006, Rodgers et al. 2007). Several shaking table tests were conducted using the above-mentioned earthquake ground motions at various peak ground acceleration levels. In this paper, maximum response profiles for the following ground motions are presented: El Centro 40%, Taft 40%, Sylmar 10% and Kobe 10% with peak ground accelerations of 0.14g, 0.07g, 0.08g and 0.08g respectively. These earthquake intensities were chosen in order to prevent inelastic deformations in the model structure during the uncontrolled seismic testing.

Figure 4 shows maximum response profiles for the N-S component of the 1940 El Centro acceleration record scaled by 40% of its actual intensity. A reduction of up to 79% in the maximum relative displacement at the fourth floor is observed (Fig. 4a). A 12% reduction in the maximum absolute acceleration at the fourth floor is achieved (Fig. 4b). The maximum inter-storey drift ratio at the second floor is also reduced by up to 79% (Fig. 4c). The total base shear is reduced by up to 8% (Fig. 4d). The effectiveness of the control system in reducing the seismic response is demonstrated for the El Centro ground motion.

Maximum response profiles are shown in Figure 5 for the 1952 Taft earthquake record scaled by 40% of its intensity. The maximum recorded relative displacement at the fourth floor is reduced by up to 75% (Fig. 5a). A 9% reduction in the maximum absolute acceleration at the fourth floor is observed (Fig. 5b). The maximum inter-storey drift ratio at the first floor is reduced by up to 72% (Fig. 5c). A 21% reduction in the total base shear is achieved (Fig. 5d). These results confirm the effectiveness of the control system to reduce the seismic response under the Taft earthquake record.

Figure 6 shows maximum response profiles for the Sylmar County 1994 acceleration record scaled by 10% of its intensity. A reduction of up to 73% in the maximum relative displacement at the fourth floor is achieved (Fig. 6a). The maximum measured absolute acceleration at the fourth floor is reduced by up to 21% (Fig. 6b). A 72% reduction in the maximum inter-storey drift ratio at the first floor is observed (Fig. 6c). The total base shear is reduced by up to 2% (Fig. 6d). These reductions validate the effectiveness of the control strategy for the Sylmar earthquake ground motion.

Maximum response profiles are shown in Figure 7 for the 1995 Kobe earthquake record scaled by 10% of its original intensity. The maximum relative displacement at the fourth floor is reduced by up to 72% (Fig. 7a). A 17% reduction in the maximum absolute acceleration at the fourth floor is observed (Fig. 7b). The maximum inter-storey drift ratio at the first floor is reduced by up to 75% (Fig. 7c). An 11% reduction in the total base shear is achieved (Fig. 7d). Control effectiveness is demonstrated by using the Kobe acceleration record as input to the shake table.

It can be seen that the absolute floor acceleration increases in some storeys of the model structure (Figs 4b, 5b, 6b and 7b). However, this represents a common trade-off with resetable stiffness-based devices (Hunt 2002, Barroso et al. 2003). Although increased accelerations may damage contents and/or disturb occupants, this trade-off depends on the building use and on any other isolation or protection systems employed. Figures 4, 5, 6 and 7 show that considerable response reductions are achieved by the semi-active control system. These results demonstrate the significant potential of the semi-active resetable devices for the seismic protection of civil engineering structures.

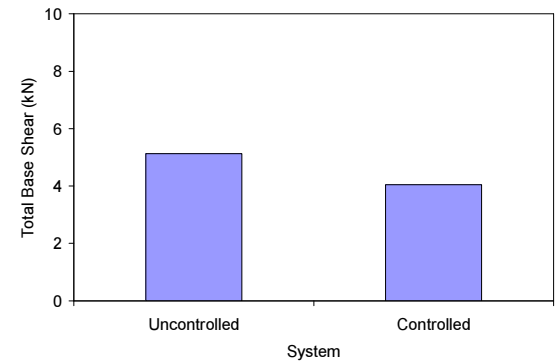
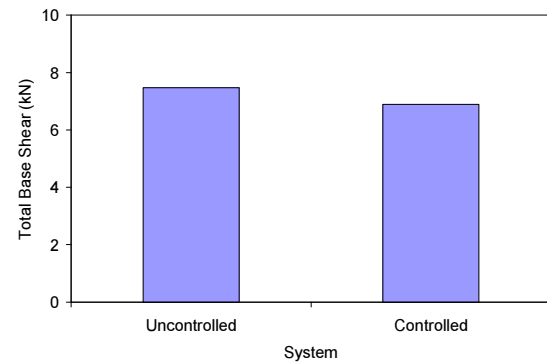
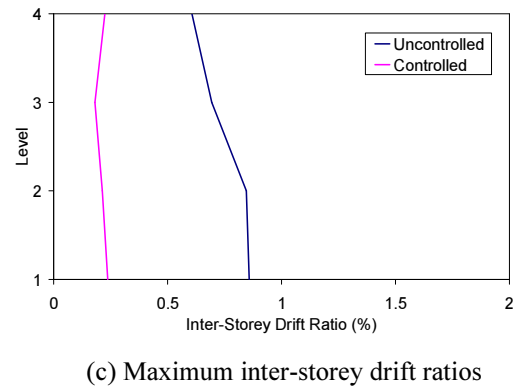
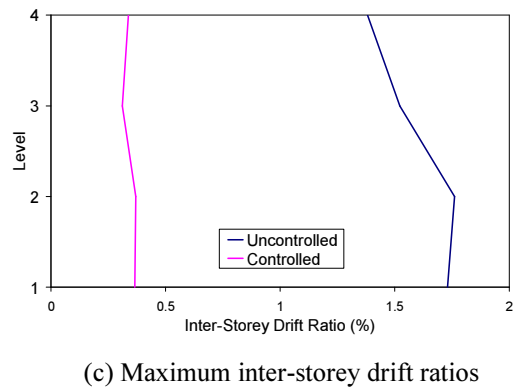
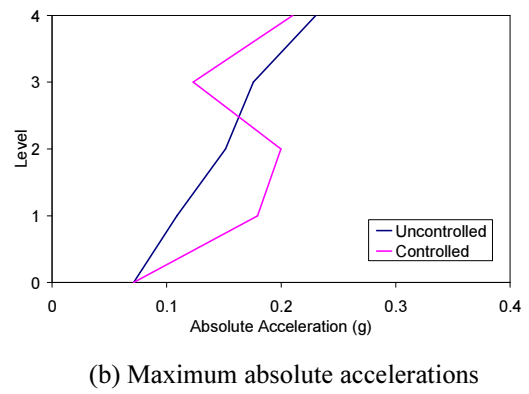
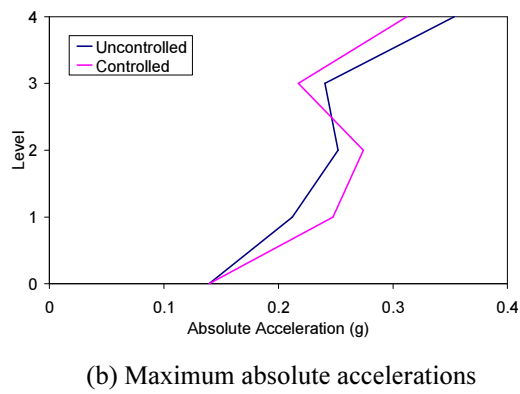
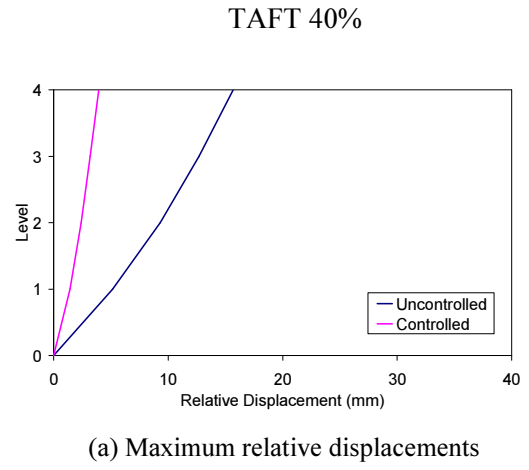
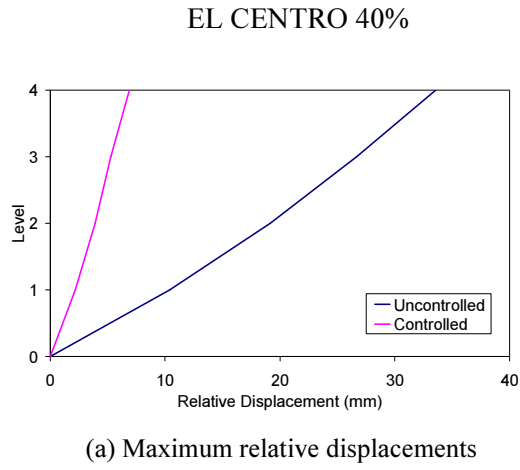


Figure 4. Maximum response envelopes.

Figure 5. Maximum response envelopes.








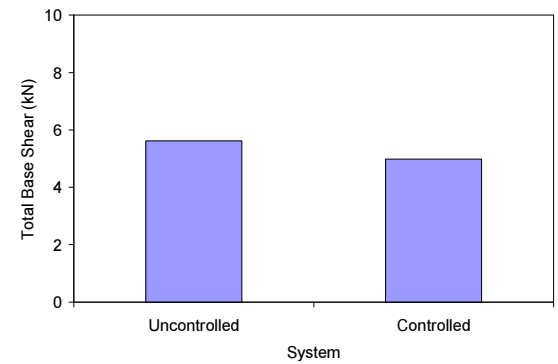


Figure 6. Maximum response envelopes.

Figure 7. Maximum response envelopes.

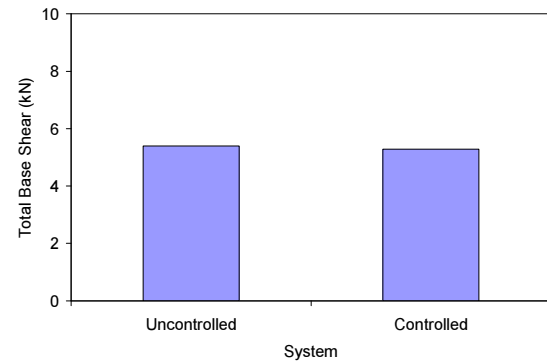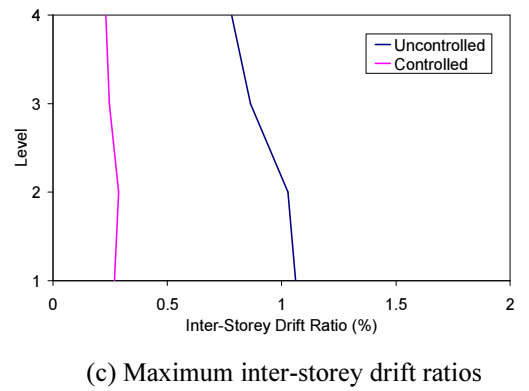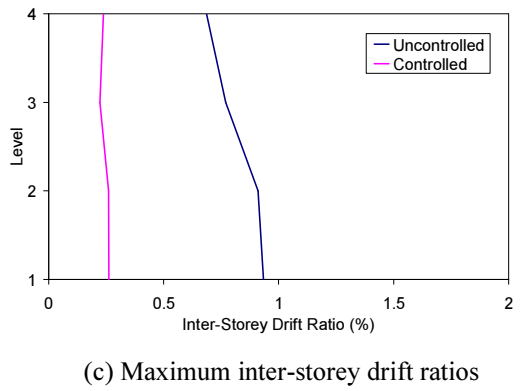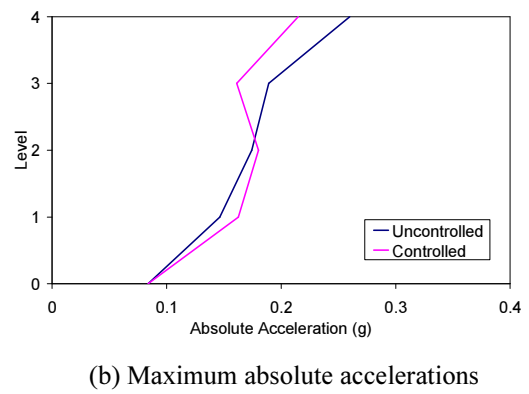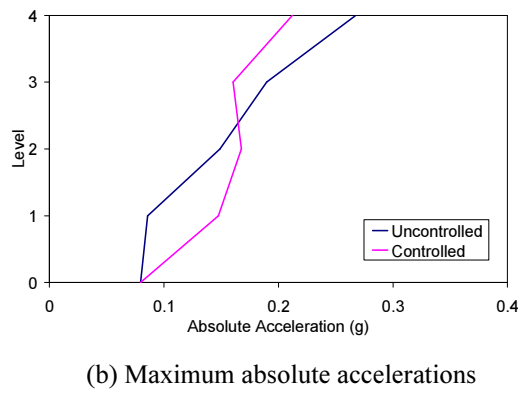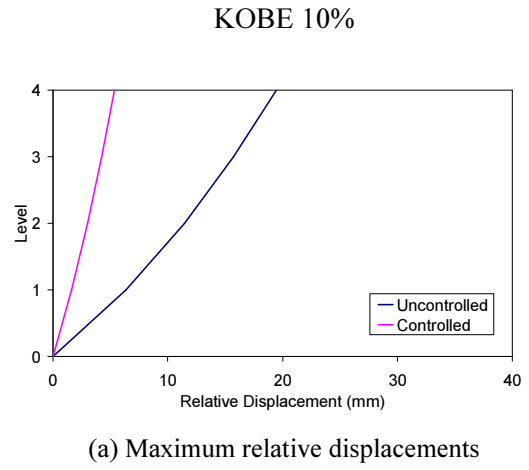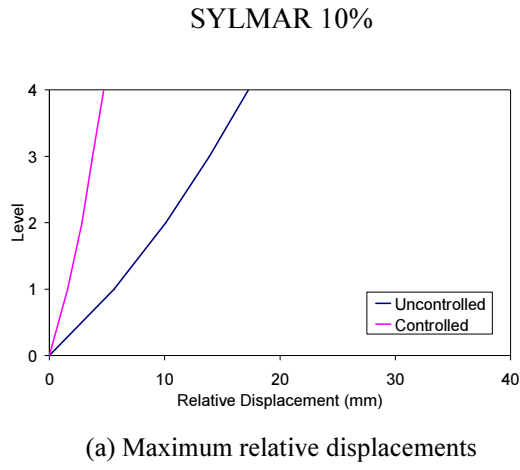

## 6 CONCLUSIONS

This paper has presented an experimental investigation on the effectiveness of semi-active resettable devices to reduce the seismic response of structures. A four-storey model structure was subjected to a series of shaking table tests. The dynamic response of the model structure was controlled by two semi-active resettable devices. The devices were installed in the lateral bracing of the model structure. The resettable devices modified the stiffness of the structure by following a control algorithm that utilised measured structural responses. Four earthquake records at different levels of intensity were used to investigate the effect of the semi-active control system in reducing the seismic response of the model structure. Maximum response profiles for selected earthquake ground motions were presented. Significant reductions in relative floor displacements and inter-storey drift ratios were achieved for all of the earthquakes selected. Modest reductions in total base shear and absolute floor accelerations were also observed. These results demonstrate that semi-active resettable devices are quite effective to reduce the response of structures over a wide range of earthquake excitations.

## REFERENCES:

- Barroso, L.R., Chase, J.G. & Hunt, S.J. 2003. Resettable smart-dampers for multi-level seismic hazard mitigation of steel moment frames. *Journal of Structural Control* 10(1): 41-58.
- Bishay-Girges, N.W. 2004. Seismic protection of structures using passive control system. PhD Thesis, University of Canterbury, Christchurch, New Zealand.
- Chase, J.G., Mulligan, K.J., Gue, A., Alnot, T., Rodgers, G., Mander, J.B., Elliott, R., Deam, B., Cleeve, L. & Heaton, D. 2006. Re-shaping hysteretic behaviour using semi-active resettable device dampers. *Engineering Structures* 28(10): 1418-1429.
- Franco-Anaya, R., Carr, A.J., Chase, J.G. & Mander, J.B. 2006. Seismic protection of a four-storey one fifth scale structure using semi-active resettable tendon elements. In Moss, P.J. & Dhakal, R.P. (eds), *Progress in mechanics of structures and materials; Proc. of the 19th Conference on the Mechanics of Structures and Materials, Christchurch, New Zealand, 29 November-1 December 2006*. The Netherlands: T & F/Balkema.
- Hunt, S.J. 2002. Semi-active smart-dampers and resettable actuators for multi-level seismic hazard mitigation of steel moment resisting frames. ME Thesis, University of Canterbury, Christchurch, New Zealand.
- Jabbari, F. & Bobrow, J.E. 2002. Vibration suppression with resettable device. *Journal of Engineering Mechanics* 128(9): 916-924.
- Kao, G.C. 1998. Design and shaking table tests of a four-storey miniature structure built with replaceable plastic hinges. ME Thesis, University of Canterbury, Christchurch, New Zealand.
- Mulligan, K.J., Chase, J.G., Gue, A., Mander, J.B., Alnot, T., Rodgers, G.W., Deam, B.L., Cleeve, L. & Heaton, D. 2005. Resettable devices with customised performance for semi-active seismic hazard mitigation of structures. In Brabhakaran P. (ed.), *Planning and engineering for performance in earthquakes; NZSEE Conference 2005, Technical papers, Wairakei, New Zealand, 11-13 March 2005*. Wellington: New Zealand Society for Earthquake Engineering.
- Pekcan, G. 1998. Design of seismic energy dissipation systems for reinforced concrete and steel structures. PhD Thesis, State University of New York at Buffalo.
- Pekcan, G., Mander, J.B. & Chen, S.S. 2000. Balancing lateral loads using tendon-based supplemental damping system. *Journal of Structural Engineering* 126(8): 896-905.
- Rodgers, G.W., Mander, J.B., Chase, J.G., Mulligan, K.J., Deam, B.L. & Carr, A. 2007. Re-shaping hysteretic behaviour -spectral analysis and design equations for semi-active structures. *Earthquake Engineering and Structural Dynamics* 36(1): 77-100.
- Symans, M.D. & Constantinou, M.C. 1995. Development and experimental study of semi-active fluid damping devices for seismic protection of structures. *Technical Report NCEER-95-0011*. National Center for Earthquake Engineering Research. State University of New York at Buffalo.
- Symans, M.D. & Constantinou, M.C. 1999. Semi-active control systems for seismic protection of structures: a state-of-the art review. *Engineering Structures* 21(6): 469-487.